


KVA	Input Voltage	Input Current
30	208Y120 or 208	124
35	208Y120 or 208	145
40	208Y120 or 208	166
45	208Y120 or 208	186
50	208Y120 or 208	207
55	208Y120 or 208	228
60	208Y120 or 208	249
65	208Y120 or 208	269
70	208Y120 or 208	290
75	208Y120 or 208	311
80	208Y120 or 208	331
85	208Y120 or 208	352
90	208Y120 or 208	373
95	208Y120 or 208	394
100	208Y120 or 208	414
105	208Y120 or 208	435
110	208Y120 or 208	456
115	208Y120 or 208	477
120	208Y120 or 208	497
125	208Y120 or 208	518
130	208Y120 or 208	539
135	208Y120 or 208	559
140	208Y120 or 208	580
145	208Y120 or 208	601
150	208Y120 or 208	622

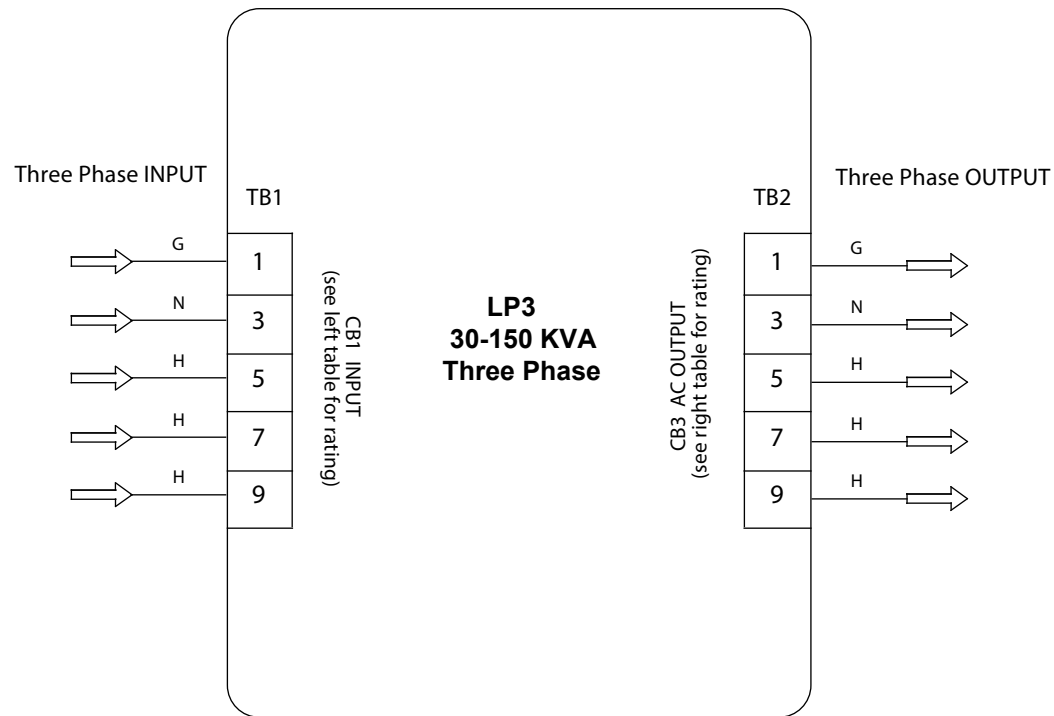

KW	Output Voltage	Output Current
15	480Y277	22
17.5	480Y277	25
20	480Y277	29
22.5	480Y277	32
25	480Y277	36
27.5	480Y277	40
30	480Y277	43
32.5	480Y277	47
35	480Y277	50
37.5	480Y277	54
40	480Y277	57
42.5	480Y277	61
45	480Y277	65
47.5	480Y277	68
50	480Y277	72
52.5	480Y277	75
55	480Y277	79
57.5	480Y277	83
60	480Y277	86
62.5	480Y277	90
65	480Y277	93
67.5	480Y277	97
70	480Y277	101
72.5	480Y277	104
75	480Y277	108

The provided integration drawing is intended solely for elevator motor loads. In situations involving divergent load types, we kindly advise engaging with DSPM for precise input and output maximum current values.